



SEATPOST INSTRUCTIONS

Thanks for buying a Whisky Parts Company product.

Whisky makes parts that are designed to keep on delivering, ride after ride, year in and year out.

⚠ WARNING

WARNING: CYCLING CAN BE DANGEROUS. BICYCLE PRODUCTS SHOULD BE INSTALLED AND SERVICED BY A PROFESSIONAL MECHANIC. NEVER MODIFY YOUR BICYCLE OR ACCESSORIES. READ AND FOLLOW ALL PRODUCT INSTRUCTIONS AND WARNINGS INCLUDING INFORMATION ON THE MANUFACTURER'S WEBSITE. INSPECT YOUR BICYCLE BEFORE EVERY RIDE. ALWAYS WEAR A HELMET.

Additional Product and Safety instructions can be found at the website www.whiskyparts.co/safety

Intended Use

INTENDED For riding on a variety of terrain and surfaces including dirt or mud surfaces. Will also work well for all-weather rough road riding and commuting.

NOT INTENDED For jumping or stunt riding.

Compatibility

Whisky Seatposts are available in 27.2 and 31.6mm diameters, with a zero and 18mm offset available in both sizes.

Seatpost diameter is critical. The diameter of the new post must precisely match the diameter of the frameset's seat tube. If the seat tube diameter is not printed at the base of the current seatpost, measure the post diameter or seat tube diameter with a pair of calipers. If you are not sure of the right size, consult your local bike shop. The diameter of the

Carbon Care

Seatposts that have been involved in a crash or show signs of damage such as cracks, chips, loose fibers, or fatigue marks should be taken out of use immediately and inspected by a qualified expert to ensure they're still safe. If evidence of damage is found, the component should be replaced or repaired.

⚠ WARNING Never put a scratch in a carbon seatpost to mark it! Doing so can ruin the seatpost and cause it to break. Instead mark your seat height by wrapping a piece of electrical tape around it right at the frame or by painting a line on it.

⚠ WARNING Overtightening the seatpost clamp on the frame can ruin the seatpost and even damage the frame. Tighten the seatpost to the recommended torque spec for the frame or seat clamp, whichever is less.

Tools:

4 and 5mm Allen wrenches
Carbon Paste

Proper Installation

We recommend the use of a high-quality, reliable torque wrench to install all Whisky parts. Remember to calibrate your torque wrench.


Seatpost Installation

1. Make sure that the inside of the frameset's seat tube is dry, and free from any dirt or burrs.
NOTE: Do not use grease on your seatpost as grease can cause damage to the carbon fiber. Carbon paste is recommended.
2. Insert the seatpost into the frame and lightly tighten the seatpost clamp to hold the post in place while installing the saddle.
NOTE: The seatpost should be oriented with the MIN. INSERTION and HEIGHT GRADATION graphics on the back of the post.
NOTE: Before sitting on the bicycle to check for proper seatpost height, tighten the seatpost bolt clamp on the frame to secure the seat in place. If it is not tight enough, it may cause the seatpost to slide down and scratch or gouge the surface which could cause damage and make the seatpost unsafe to use.
3. Once the desired height is achieved, tighten seatpost clamp bolt on the frame or the seatpost clamp to the frame manufacturer's specifications.
4. Make sure that the post is not raised above the minimum insertion line near the bottom of the seatpost.

Saddle Installation


For the ZERO offset seatpost: (figure 1)

1. Make sure that the post is not raised above the minimum insertion line at the bottom of the seatpost.
2. Loosen the 4mm bolt on the side of the saddle rail clamps enough to insert the rails of the saddle into the cradle assembly.
3. Lightly retighten the 4mm side rail clamp bolt to hold the saddle in place and move the saddle to achieve the desired fore and aft adjustment.
4. Tighten or loosen the 4mm bolts at the bottom of the front and the back of the saddle rail clamp assembly to achieve the desired saddle tilt.
5. When the saddle is in the desired position, tighten all the 4mm bolts to 5-6Nm.

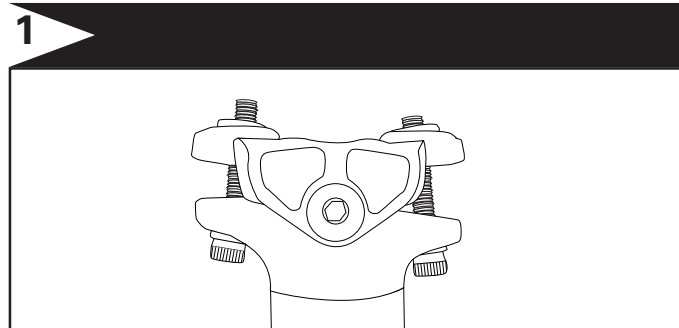

For the 18mm offset seatpost: (figure 2)

1. Make sure that the post is not raised above the minimum insertion line near the bottom of the seatpost.
2. Loosen both the adjustment wheel at the top of the saddle rail clamp and the 5mm bolt below the saddle rail clamp enough to get a saddle rail between the top and bottom clamps on one side of the assembly.
3. Move the rail inward enough to make room for the other rail to get between the top and bottom clamps on the other side.
4. Position the rails in the saddle rail clamp grooves and begin to tighten the adjustment wheel and the rearward bolt so that tilt adjustments can begin to be made. Rotating the wheel and tightening or loosening rear bottom bolt will allow for tilt adjustments. Make your fore and aft adjustments. When the desired fore and aft adjustments and saddle angle are achieved, tighten the rearward bottom 5mm bolt to 9Nm max.

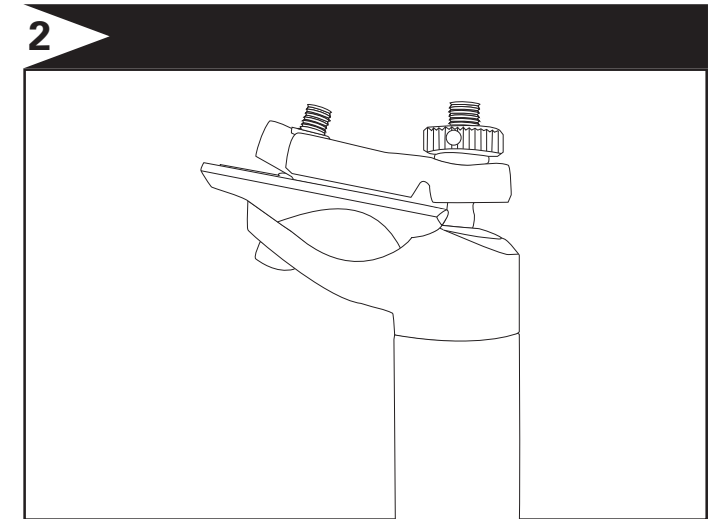

Ongoing Maintenance

Clean with light soap and water. Dry with a rag.

If your rag snags on something, it could be a sign of damage. Also, carefully listen for uncommon sounds when riding, such as creaking, cracking, or popping, which could mean there's a problem. If you're not sure, don't take chances. Visit your bicycle shop and ask an expert to take a look.

Avoid exposing your bicycle and components to high temperatures such as leaving them inside a parked car in the sun or storing them next to heat sources or radiators. Excessive heat can deteriorate the adhesive which joins the seatpost parts.



Limited Warranty

Whisky Parts Co. warrants this part against manufacturing defects in materials, craftsmanship and design for a period of five years from the date of purchase for only the original owner with accompanying proof of purchase.

This warranty applies to and covers only Whisky Parts Co. branded product.

TO THE EXTENT NOT PROHIBITED BY LAW, THESE WARRANTIES ARE EXCLUSIVE AND THERE ARE NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Warranty Exclusions:

- Damage due to improper installation or follow-up maintenance or lack of skill, competence or experience of the user or assembler
- Products that have been modified, neglected, used in competition or for commercial purposes, misused or abused, involved in accidents or anything other than normal use
- Installation of components, parts, or accessories not originally intended for or compatible with Whisky Parts Co. products
- Damage or deterioration to the surface finish, aesthetics, or appearance of the product including but not limited to paint damage
- Normal wear and tear
- Labor required to remove and/or refit and re-adjust the product within the bicycle assembly
- Damage to carbon fiber caused by any carbon assembly paste

This limited warranty is expressly limited to the repair or replacement of a defective product, at the option of Whisky Parts Co. and is the sole remedy of the warranty. This limited warranty applies only to the original purchaser of the product and is not transferrable. This warranty applies only to products purchased through an authorized dealer or distributor. In no event shall Whisky Parts Co. be liable for any loss, inconvenience or damage, whether direct, incidental, consequential, or otherwise resulting from breach of any express or implied warranty or condition, of merchantability, fitness for a particular purpose, or otherwise with respect to Whisky Parts Co. products except as set forth herein. This warranty gives the consumer specific legal rights, and those rights and other rights may vary from place to place. This warranty does not affect your statutory rights. Whisky Parts Co. products are warranted against manufacturing defects in materials and workmanship from the date of retail purchase of the product, subject to the limitations detailed above.

Submitting a Claim

Claims can be made anywhere Whisky Parts Co. products are sold. When in doubt, contact your local shop. Chances are pretty good they can assist.

Please provide details about what happened including but not limited to other components used in conjunction with the alleged defective Whisky part. Proof of purchase is required before a warranty claim is processed. Failure to register will not affect consumer rights under the limited warranty stated above, so long as the consumer can show in a reasonable manner proof of original ownership and the date the Whisky Parts Co. product was purchased.